



# ILM-100

## Insertion Loss Meter



### Product Overview

The Insertion Loss Meter, ILM-100, was designed to measure insertion loss on fiber optic components quickly and accurately. The system has a built-in stabilized laser source for single-mode applications or LED source for multimode applications. With a dual wavelength configuration, insertion loss can be measured for two wavelengths in less than 1 second. ILM-100 system comes with both USB and ethernet control for ease of integration into test systems.

### Features

- Compact benchtop instrument for all-in-one operation
- USB and Ethernet interface
- Test software OPL-CLX available for logging measurements
- Fully automated single and dual wavelength insertion loss measurements
- Multimode instruments available with define launch conditions (EF, AS100, 70/70, etc.)
- Various detector options
- Customizable sources and fiber types
- Interchangeable adapter interface



### Applications

- Cable assembly testing
- Optical alignment
- Signal monitoring



### Compliance

- IEC-61300-3-4



### USB and Ethernet Communication

With both USB and Ethernet communication interfaces, the ILM-100 can be easily integrated into any production automation environment. The ILM-100 is compatible with the OPL-CLX software, perfect for performing cable assembly measurements, recording results in database and printing results.



### Multimode Launch Condition Control

ILM-100 multimode sources can be internally configured to meet launch condition requirements for specific applications. No need to have an external modal conditioner.



### Customizable Source and Detector Types

ILM-100 can accommodate many different fiber optic source types depending on your requirements: DFB, FP, LED, etc. Along with many different fiber types and optical power meter types, ILM-100 is one of the most configurable insertion loss meters on the market.



### ILM Optical / Electrical Specifications

Parameter	Specification	
	Single-mode	Multimode
Fiber Type (μm)	9/125	50/125, 62.5/125 or 100/140
Launch Condition	N/A	Available upon request
Nominal Wavelengths (nm) <sup>1</sup>	1310 / 1490 / 1550 / 1625	850 / 1300
Output Power (typical) (dBm)	0	-18 / -21
Source Stability (dB) <sup>2</sup>	± 0.02	
Detector Type	1 mm InGaAs / 3 mm InGaAs	
Power Range (dBm)	6 to -72 / 3 to -72	
Detector Linearity (dB) <sup>3</sup>	± 0.02 (< 10 dB)	
	± 0.05 (> 10 dB)	
Detector Total Uncertainty (dB) <sup>4</sup>	± 0.25	
Remote Interface	USB or Ethernet	
Display	4.3" touch screen	
Power Supply	Input: 90 - 264 V AC, 47 - 63 Hz	
	Output: 18V DC, 5 A	
Power Consumption (VA)	36 maximum	

**Notes:**

<sup>1</sup> Custom sources available upon request

<sup>2</sup> Over 1 hour with maximum temperature variation of 1 °C

<sup>3</sup> Measured at 1490 nm, between 3 to -65 for 1 mm, 0 to -65 for 3 mm

<sup>4</sup> At calibration conditions for all NIST traceable wavelengths

# Insertion Loss Meter

## Mechanical / Environmental Specifications

Parameter	Specification
Max Channel Count	24
Unit Dimension W x H x D (cm)	42.5 x 8.9 x 20.3
Operating Temperature (°C)	5 to 40
Humidity (Non-condensing)	Maximum 80% RH <sup>1</sup>

Notes:

<sup>1</sup> From 5 to 31 °C, decreasing linearly to 50% RH at 40 °C




## Ordering Scheme & Instructions

### 1. Configure ILM Insertion Loss Meter


#### Single-mode version

ILM-100 -

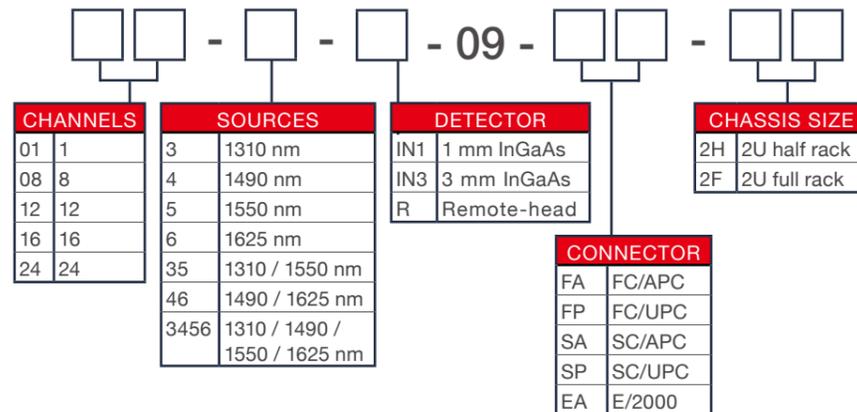

#### Multimode version

ILM-100 -

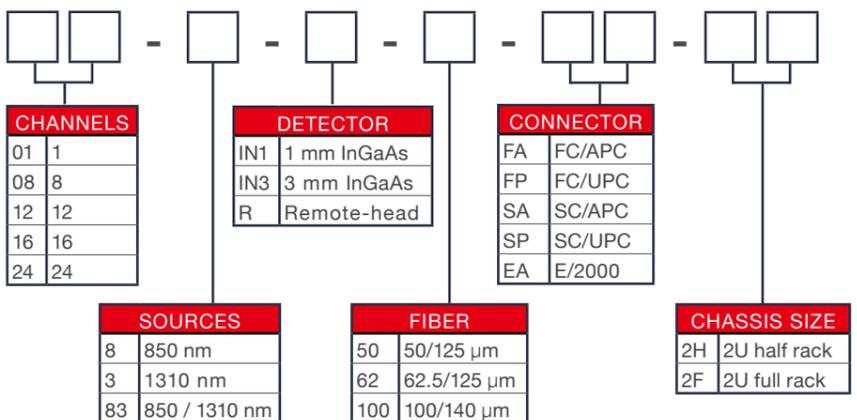

## In the Box

### ILM-100- Insertion Loss Meter

- ILM-100
- Power Cable
- 18V AC-DC Power Supply
- USB Cable



### Santec Regional Sales Offices

#### Santec Japan Corporation

5823 Ohkusa-Nenjozaka, Komaki,  
Aichi, 485-0802, Japan  
Tel: +81-568-79-3536 | Fax: +81-568-79-1718

#### Santec Europe Ltd.

99 Park Drive, Milton Park, Abingdon,  
Oxfordshire, OX14 4RY, UK  
Tel: +44-20-3176-1550

#### Santec USA Corporation

400 Kelby Street, Suite 1501  
Fort Lee NJ 07024 USA.  
Toll Free: +1-800-726-8321

#### Santec (Shanghai) Corporation Limited

21F Room H, Hua Du Bldg., No.838 Zhangyang Road  
Pudong District, Shanghai, 200122, China  
Tel: +86-21-5836-1261

2022© SANTEC CORPORATION Santec reserves the right to make changes in equipment design, components or specifications without notice.

ILM-100-C-E/Ver.1.3 CODE-202406-TB-KT-CPY

www.santec.com

The Photonics Pioneer

